SS-H900

SERVICE MANUAL

AEP Model

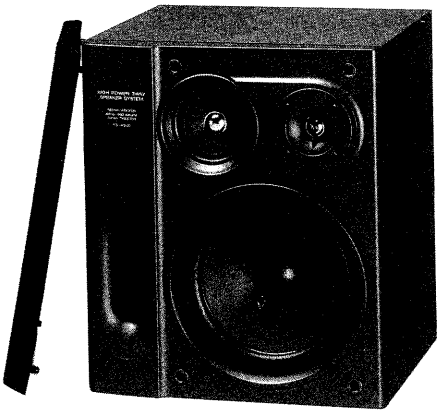

• SS-H900 is the speaker system in MHC-900.

SPECIFICATIONS

Speaker system	3-way
Speaker units	Woofer: 16 cm dia., cone type
	Tweeter: 6 cm dia., cone type
	Super tweeter: 2 cm dia., dome type
Enclosure type	Bass reflex
Frequency range	55Hz to 20,000Hz
Sensitivity	89 dB/W/m
Rated impedance	6 ohms
Dimensions	Approx. 245x285x230mm
Weight	Approx. 4.4 kg net per speaker

Design and specifications subject to change without notice.

1. WIRING DIAGRAM

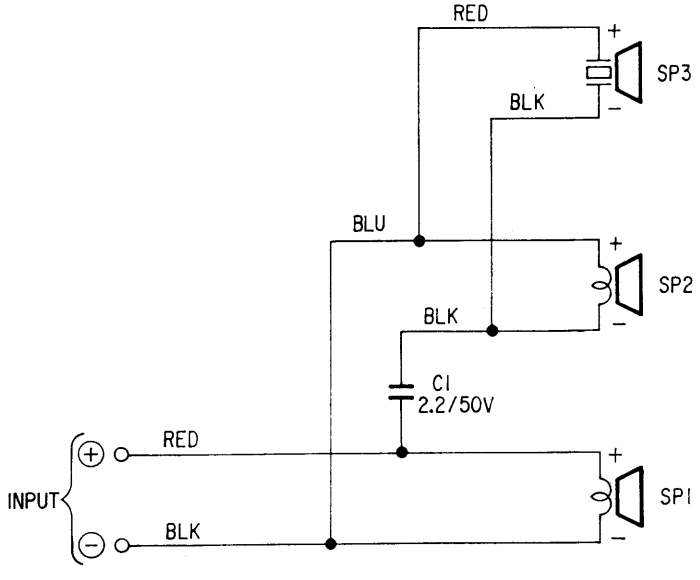

SPEAKER SYSTEM

SONY®

2. EXPLODED VIEW AND PARTS LIST

NOTE:

- -XX,-X mean standardized parts, so they may have some difference from the original one.
- Color indication of Appearance Parts.
  Example:
  KNOB,BALANCE (WHITE) . . . (RED)
  ↑ Parts Color ↑ Cabinet's Color
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- The mechanical parts with no reference number in the exploded views are not supplied.

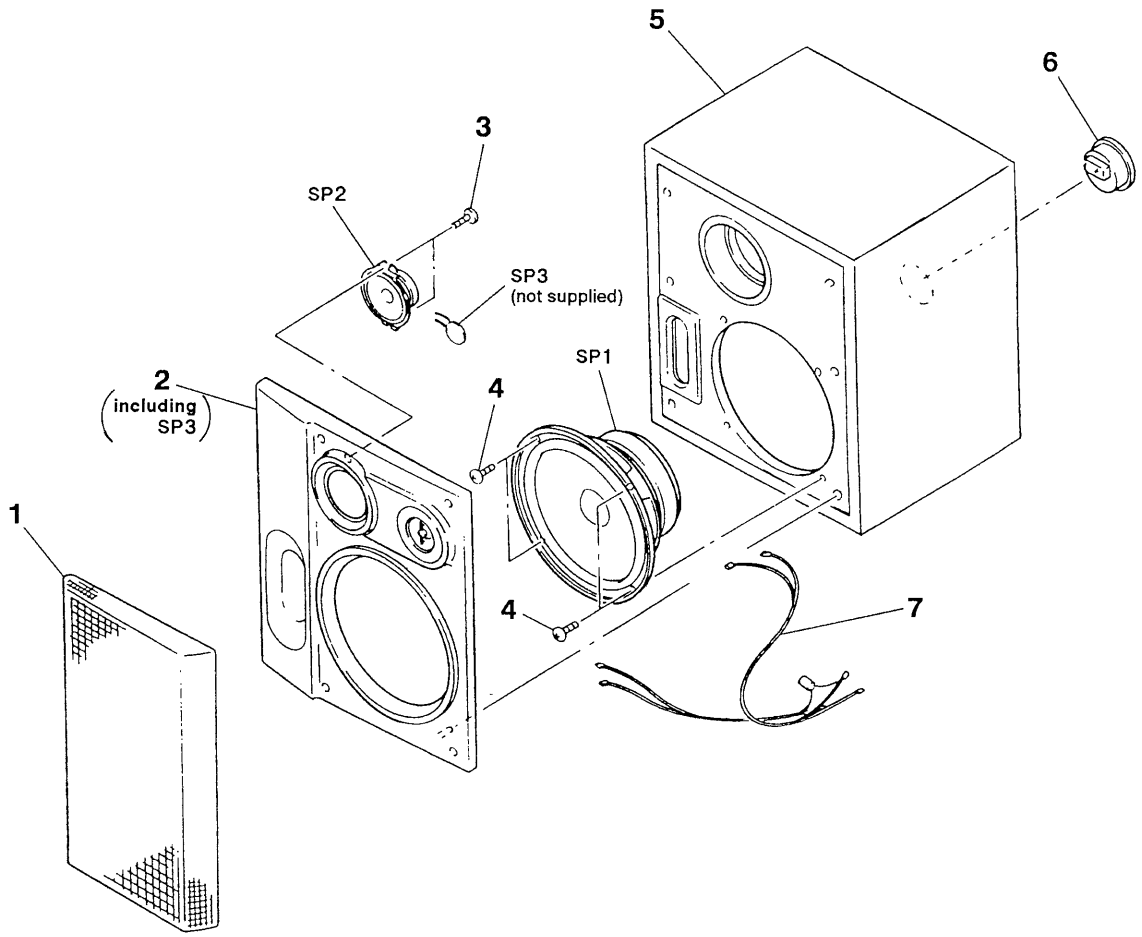

Ref. No.	Part No.	Description	Remark
1	X-4942-350-1	FRAME (R) ASSY, GRILLE	
1	X-4942-713-1	FRAME (L) ASSY, GRILLE	
2	X-4943-277-1	PANEL (R) ASSY, FRONT	
2	X-4943-276-1	PANEL (L) ASSY, FRONT	
3	7-685-659-79	SCREW +BVTP 4X8 TYPE2 SLIT	
4	4-874-614-11	SCREW +BVTP 3.5X14	

Ref. No.	Part No.	Description	Remark
* 5	X-4942-714-1	CABINET (R) ASSY, SPEAKER (AEP)	
* 5	X-4942-715-1	CABINET (L) ASSY, SPEAKER (AEP)	
* 5	X-4943-156-1	CABINET (R) ASSY, SPEAKER (Germany)	
* 5	X-4943-158-1	CABINET (L) ASSY, SPEAKER (Germany)	
6	1-537-332-11	TERMINAL BOARD	
7	1-696-553-12	CORD, CONNECTION	
SP1	1-544-769-11	SPEAKER (16CM)	
SP2	1-544-770-11	SPEAKER (6CM)	

9-957-576-11

Sony Corporation
Audio Group

English
92L0650-1
Printed in Japan

©1992.12

Published by Audio Corporate Planning Group